

SYSTEM DATA SHEET

PORPLASTIC *INDOOR PEL* *basic*

Standard flooring system for school and multipurpose sports halls
point-elastic according EN 14904

Porplastic

The sports brand by **viacor**.




DIN 18032-2 and
EN 14904 certified

Low
emission



Many colours

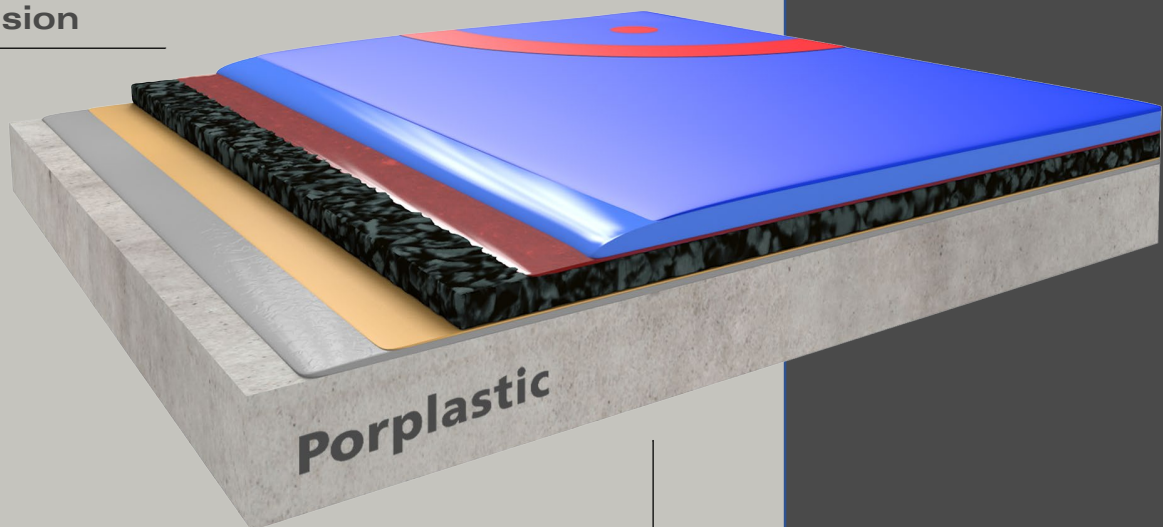

Application fields

Sports halls

School sports halls

Multi purpose leisure halls

VIACOR Polymer GmbH

Graf-Bentzel-Str. 78

72108 Rottenburg

Tel. 07472 94 999-0

Fax 07472 94 999-39

info@viacor.de

www.viacor.de


Application and Consumption

LAYER	CONSUMPTION	THICKNESS	TOOL
LINE PAINT PORPLASTIC X8005 	10 – 15 g/lfm	0,1 – 0,2 mm	Brush or roller
FLEXIBLE TOP FINISH PORPLASTIC S6000P 	0,12 – 0,15 kg/m ²	0,1 mm	roller
ELASTIC LAYER PORPLASTIC C524 	2,0 – 3,0 kg/m ²	2 – 3 mm	Pin rake
SELF-LEVELLING LAYER PORPLASTIC C524 	0,4 – 0,8 kg/m ²	ca 0,5 mm	Rubber squeegee
PORE SEALER PORPLASTIC L375 	ca 0,3 – 0,7 kg/m ²	0,1 – 0,2 mm	Rubber squeegee or metal towel
ELASTICMAT+ADHESIVE PORPLASTIC MAT ^(basic) PORPLASTIC B976 	ca 0,8 kg/m ² (Adhesive)	4 – 10 mm (Elastic mat)	Cut and embed in fresh adhesive, notched trowel
PRIMER VIASOL EP-P210 	ca 0,4 kg/m ²	ca 0,2 mm	Roller or rubber squeegee

Performance-Check

 gloss of 23 %	 vertical ball behavior >96%	 shock absorption 17-30 %
 permanent elasticity	 resistance to wear of 30mg	 Available in many colours
 Water impermeable	 impact resistance of 9 – 13 Nm	 sliding coefficient of 100

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore no liability claims can be derived from the system data sheet. As all VIACOR data sheets are updated on a regular basis it is the users responsibility to obtain the most recent issue (see www.viacor.de or contact us directly). Date of issue: **January 2024** – all technical information is subject to change without prior notice

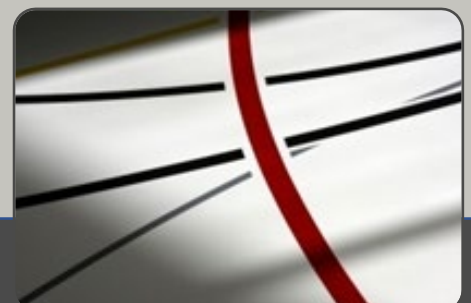

Manufacturer: