

SYSTEM DATA SHEET

PORPLASTIC *M olympic ultra*


Only Two-Layer Full PU-Bound System with coloured EPDM Granules, Water-Impermeable

ULTIMATE SPORT SURFACE



Ultra Robust

Only 2 layers

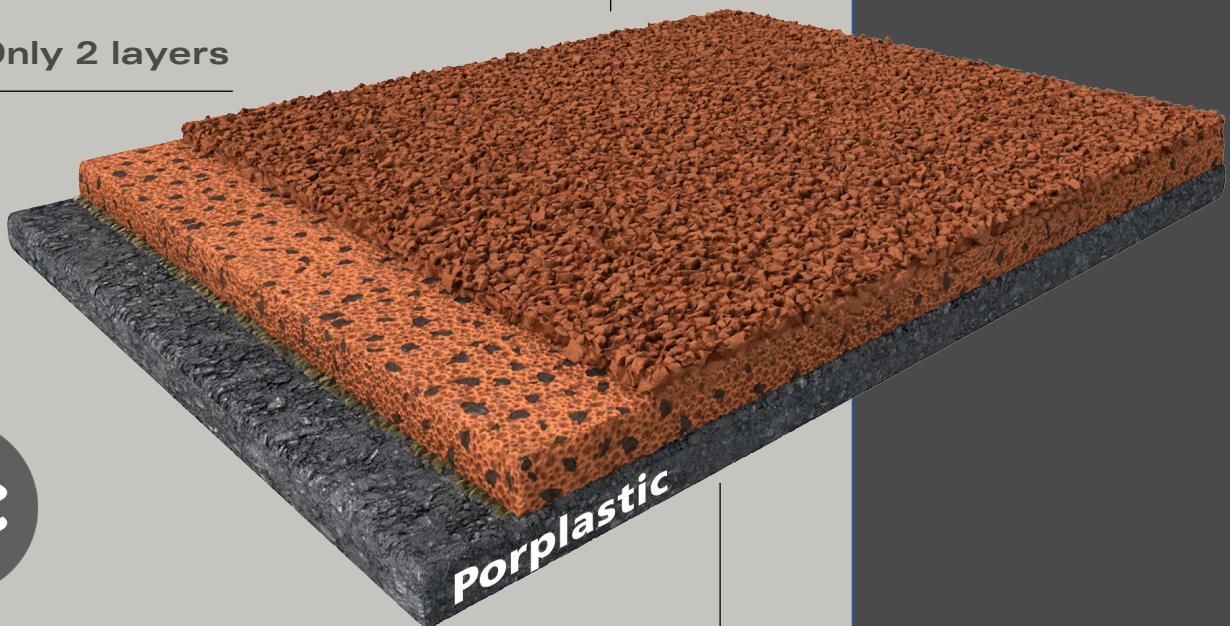

World Athletics
certified

Application fields

Running tracks

Run up tracks

Short distance tracks

Athletic sport areas Typ A, B, C

High performance sport

International competition

Olympia world championships

Porplastic

The sports brand by **viacor**.



VIACOR Polymer GmbH

Graf-Bentzel-Str. 78

72108 Rottenburg







Tel. 07472 94 999-0

Fax 07472 94 999-39










info@viacor.de

www.viacor.de




Application and consumption

LAYER	Consumption	Thickness	Application
LINE PAINT PORPLASTIC X8090 	20 – 30 g/lfm	ca 0,1 – 0,2 mm	Spray
UV-SEALER (optional) PORPLASTIC S6020 	0,17 – 0,2 per layer	ca 0,1 mm	Spray, in 2 layers
WEARING LAYER PORPLASTIC C555 PORPLASTIC EPDM (1-4mm) 	ca. 3 kg/m ² 3,0 net 4,0 total	ca 3 - 5 mm	Notched squeegee, Broadcasting, remove excess
ELASTIC LAYER PORPLASTIC C550 PORPLASTIC SBR (1-4mm) 	ca. 2,5 – 3 kg/m ² 3,5 net 4,5 total	ca 10 mm	Notched squeegee, Broadcasting, remove excess
PORE SEALER PORPLASTIC L370 	1,1 – 1,8 kg/m ²	0,1 – 0,2 mm	Squeegee or paving- machine with trowel- bar
PRIMER (optional) PORPLASTIC P270 (for asphalt) 	0,15 – 0,2 kg/m ²	0,1 mm	Roll or spray

Performance-Check

-  **WA-certified**
14,1 mm
-  **Ultra shock absorbtion of**
42%
-  **Ultra elongation at**
break of 106%
-  **Ultra robuste tensile**
strength 0,64 N/mm²
-  **friction 0,67**
-  **can handle constant**
toughest stresses by
spikes
-  **vertical deformation of**
2,2 mm
-  **environmentally friendly**
-  **available in may colours**

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore no liability claims can be derived from the system data sheet. As all VIACOR data sheets are updated on a regular basis it is the users responsibility to obtain the most recent issue (see www.viacor.de or contact us directly). Date of issue: **January 2024** – all technical information is subject to change without prior notice

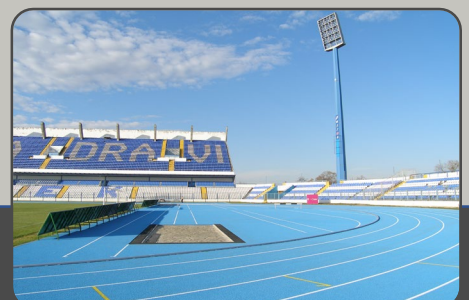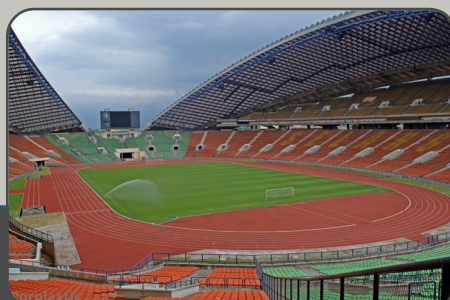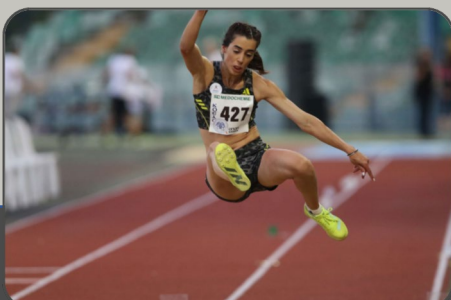

Manufacturer: