

SYSTEM DATA SHEET

PORPLASTIC *ACTIVE* court


Only one layer/ water-permeable/ available in many colors

THE FAST AND SIMPLE MULTI COURT



Extremely abrasion
resistance

Water permeable

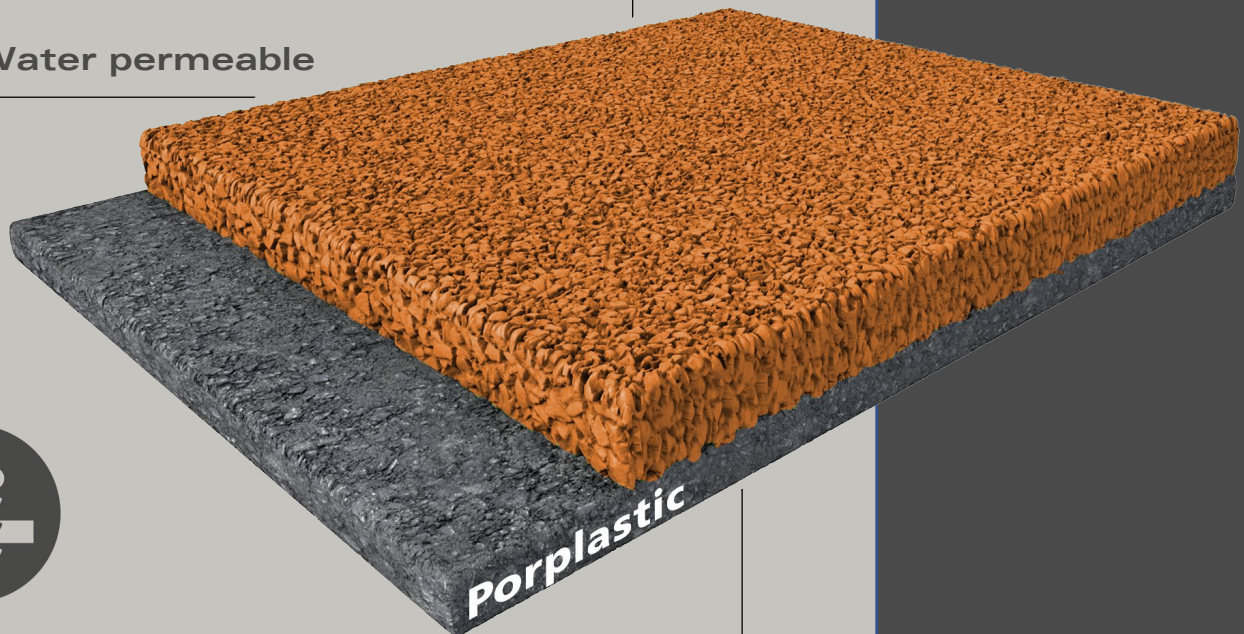

Available
in many colors

Application fields

Tennis courts

Simple small fields

Multi purpose fields

Decorative areas

Ideal for revitalisation

Porplastic

The sports brand by **viacor**.



VIACOR Polymer GmbH

Graf-Bentzel-Str. 78

72108 Rottenburg





Tel. 07472 94 999-0

Fax 07472 94 999-39













info@viacor.de

www.viacor.de

Application and Consumption

LAYER	Consumption	Thickness	Application
LINE PAINT PORPLASTIC X8090 	20 – 30 g/lfm	ca. 0,1 – 0,2 mm	Spray
UV-SEALER (optional)  PORPLASTIC S6020 (SR)	0,17 – 0,2 kg/m ² per layer	0,1 – 0,2 mm	Spray, in 2 layers
BASE-LAYER PORPLASTIC T770 PORPLASTIC EPDM (1-4mm) 	2 – 4 kg/m ² 10 – 20 kg/m ²	10 – 20 mm	Paving-machine
PRIMER (asphalt) VIASOL EP-P270 	0,15 – 0,2	ca 0,1	Roll or spray

Performance-Check

 resistance to wear of 1,47g	 shock absorption 34%	 elongation at break 52%
 tensile strength 0,62 N/mm ²	 friction of dry: 103 wet:56	 ball reflexion 101%
 Vertical deformation of 1,7 mm	 environmental requirements	 available in many colours
 Water permeable	 weather resistant	 UV resistant

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore no liability claims can be derived from the system data sheet. As all VIACOR data sheets are updated on a regular basis it is the users responsibility to obtain the most recent issue (see www.viacor.de or contact us directly). Date of issue: **January 2024** – all technical information is subject to change without prior notice



Manufacturerr: