

PORPLASTIC *FUN 40*


elastic and decorative surfaces for playgrounds, critical fall height 1.14 m

PLAYGROUNDS FOR ALL



Critical fall height = 1.14m

Hygienic

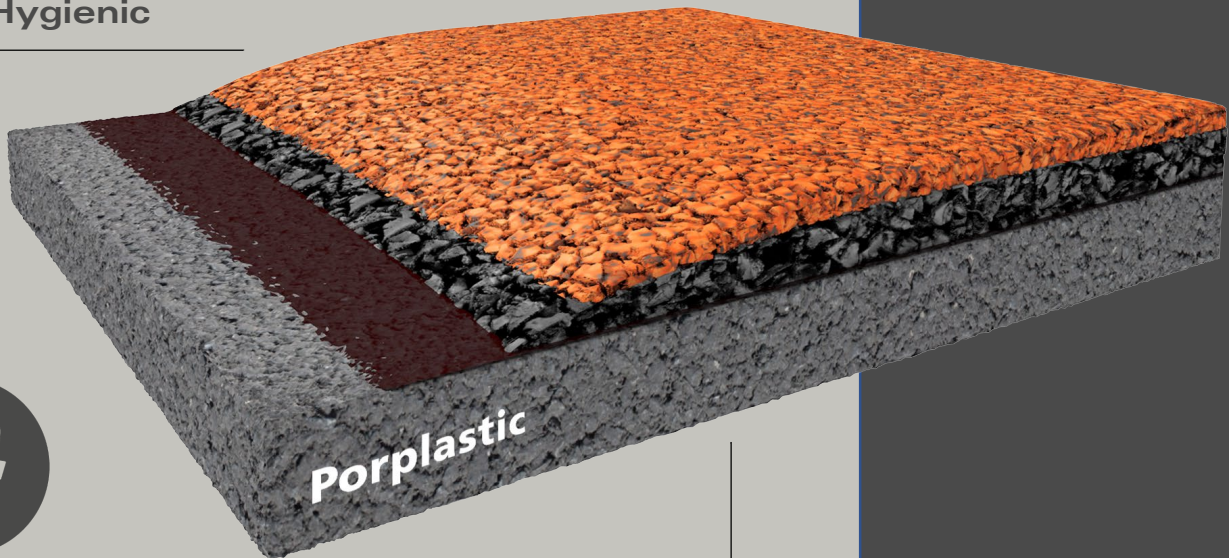

Creative use of colors

Application fields

Play zones in schools

Toddler zones in open air baths

Walkways in kindergartens or schools

Playgrounds

Coating of concrete green bodies



VIACOR Polymer GmbH

Graf-Bentzel-Str. 78

72108 Rottenburg





Tel. 07472 94 999-0

Fax 07472 94 999-39

info@viacor.de

www.viacor.de


Application and Consumption

LAYER	CONSUMPTION	THICKNESS	APPLICATION
WEARING LAYER PORPLASTIC T760/ T770 PORPLASTIC EPDM (1-4mm) 	2 – 3 kg/m ² 10 – 15 kg/m ²	10 – 15 mm	Manuel or paving machine
HIGHLY ELASTIC LAYER PORPLASTIC T770/ T776 PORPLASTIC SBR (2-8mm) 	ca. 1,8 kg/m ² ca 18 – 20 kg/m ²	ca. 30 mm	Manuel or paving machine
PRIMER PORPLASTIC P270 (for asphalt) 	0,15 – 0,2 kg/m ²	ca. 0,1 mm	Roll or spray
PRIMER PORPLASTIC P274 (for concrete) 	0,1 – 0,2 kg/m ²	ca. 0,1 mm	Roll or spray

Performance-Check

-  available in many colours
-  easy to care with high pressure stream heater
-  Hygienic
-  UV-sealer recommended for sensitive colours
-  Jointless
-  total thickness of system 40 - 45 mm
-  critical fall high 1,14 m
-  tested according to DIN EN 1177:2018
-  permanent elasticity
-  water-permeable
-  weather-resistant

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore no liability claims can be derived from the system data sheet. As all VIACOR data sheets are updated on a regular basis it is the users responsibility to obtain the most recent issue (see www.viacor.de or contact us directly). Date of issue: **January 2024** – all technical information is subject to change without prior notice

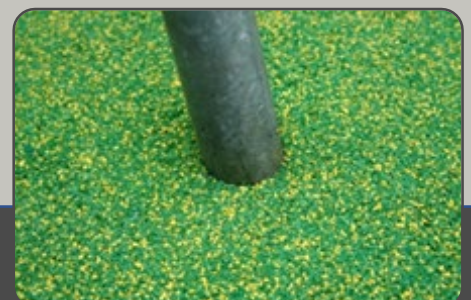

Manufacturer: