

SYSTEM DATA SHEET


PORPLASTIC *TENNIS comfort*

Tennis court flooring system for indoor and outdoor
point-elastic according to EN 14904, ITF classified



Low maintenance

Equal ball relection

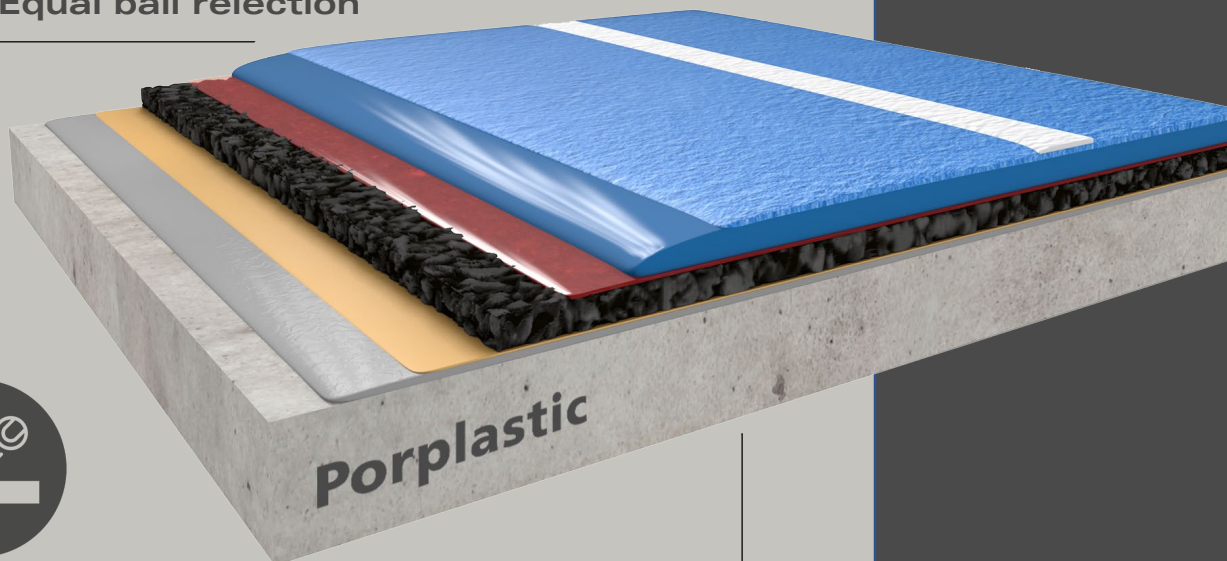

Very durable

Application fields

Tennis courts indoor/ outdoor

Porplastic

The sports brand by **viacor**.



VIACOR Polymer GmbH

Graf-Bentzel-Str. 78

72108 Rottenburg

Tel. 07472 94 999-0

Fax 07472 94 999-39






info@viacor.de

www.viacor.de


Application and Consumption

LAYER	Consumption	thickness	Application
LINE PAINT PORPLASTIC X8085 SR 	20 – 30 g/lfm	ca. 0,1 – 0,2 mm	Roller or brush
STRUCTURED TOP FINISH PORPLASTIC S6085 SR 	2 layers: 540g 3 layers: 900g	0,3 mm 0,5 mm	Rubber squeegee
SELF LEVELLING LAYER PORPLASTIC C524 	ca 2,0 kg/m ²	ca 1,5 mm	Notched squeegee
PORE SEALER PORPLASTIC L375 	ca 0,6 kg/m ²	0,1 – 0,2 mm	Rubber squeegee or metal trowel
ELASTIC MAT+ADHESIVE PORPLASTICbasic matt  PORPLASTIC B976	--- ca 0,8 kg/m ²	4 – 10 mm ---	Cut and embed in fresh adhesive Notched trowel
PRIMER VIASOL EP-P210 	ca 0,4 kg/m ²	ca 0,2 mm	Roller or rubber squeegee

Performance-Check

 Water impermeable	 good scratch and abrasion resistance	 low maintenance
 available in many colours	 easy to clean	 equal ball reflection
 permanent elasticity	 shock absorption of 17-30 %	 ITF certified

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore no liability claims can be derived from the system data sheet. As all VIACOR data sheets are updated on a regular basis it is the users responsibility to obtain the most recent issue (see www.viacor.de or contact us directly). Date of issue: **January 2024** – all technical information is subject to change without prior notice

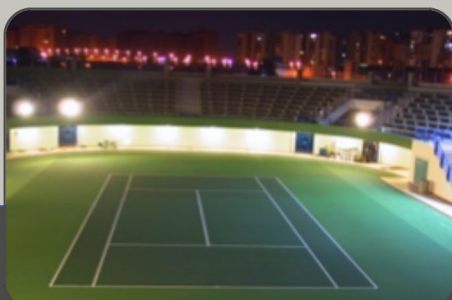

Manufacturer: