

SYSTEM DATA SHEET

PORPLASTIC *TENNIS* *comfort pro*

Tennis court flooring system for indoor and outdoor
point-elastic according to EN 14904, ITF classified




No maintenance!

Equal ball reflection



Very durable

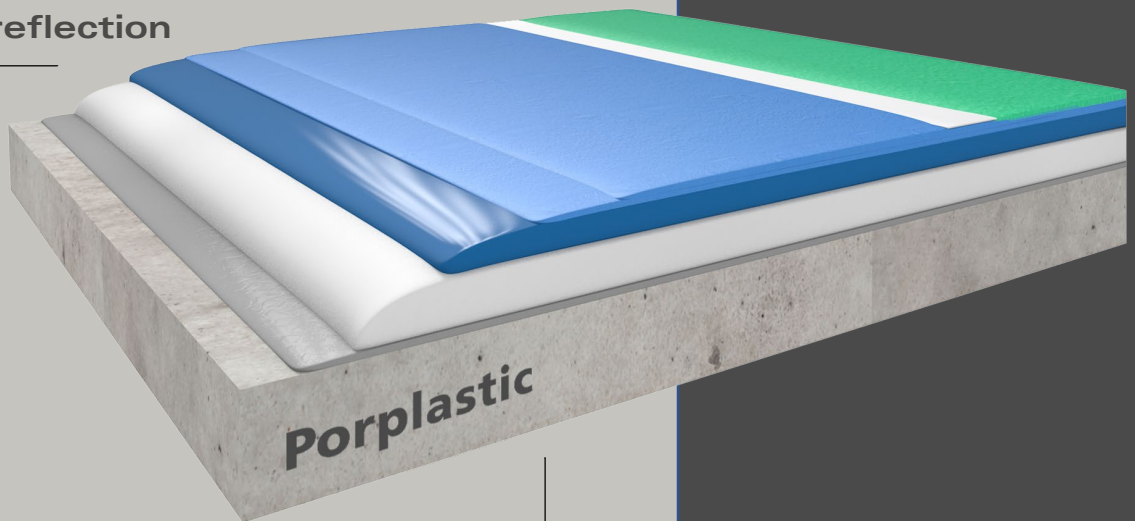

Application fields

Tennis courts indoor/ outdoor

Porplastic

The sports brand by **viacor**.



VIACOR Polymer GmbH

Graf-Bentzel-Str. 78

72108 Rottenburg






Tel. 07472 94 999-0

Fax 07472 94 999-39

info@viacor.de

www.viacor.de


Application and Consumption

LAYER	Consumption	thickness	Application
LINE PAINT PORPLASTIC X8085 SR 	20 – 30 g/lfm	ca. 0,1 – 0,2 mm	Roller or brush
STRUCTURED TOP FINISH PORPLASTIC S6095 SR 	150 – 200g per Layer (in 2 layers)	0,3 mm	Rubber squeegee
SELF LEVELLING LAYER PORPLASTIC C524 	ca 2,0 kg/m ²	ca 1,5 mm	Notched squeegee
ELASTIC LAYER PORPLASTIC L390 M 	4,5 – 7,5 kg/m ²	6-10 mm	Notched squeegee
PRIMER VIASOL EP-P210 	ca 0,4 kg/m ²	ca 0,2 mm	Roller or rubber squeegee

Performance-Check

 Water impermeable	 best in scratch and abrasion resistance	 no maintenance
 available in many colours	 easy to clean	 equal ball reflection
 permanent elasticity	 shock absorption of 17-30 %	 ITF certified

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore no liability claims can be derived from the system data sheet. As all VIACOR data sheets are updated on a regular basis it is the users responsibility to obtain the most recent issue (see www.viacor.de or contact us directly). Date of issue: **January 2024** – all technical information is subject to change without prior notice

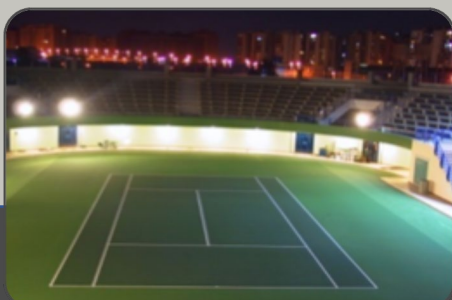

Manufacturer: